

Hydraulics

Industrial lubricants.

moeve



moeve

before  CEPSA

We are a global company comprising over 11,000 employees, **committed to sustainable energy and mobility.**

Our ambition is to drive Europe's energy transition and accelerate decarbonization both within the company and for its customers.

We have more than 90 years of experience. This has led us to become one of the **leading companies in the Spanish energy sector** and to expand our activities across five continents.

In 2022, we launched our **Positive Motion** strategy to become a leader of the energy transition.

Since 2024, we have been Moeve, a decisive step that ensures today's energy supply while focusing on enabling the sustainable energy of tomorrow.

Our lubricants also are part of this transformation. The San Roque blending and packaging plant operates entirely with 100% renewable electricity. This milestone drives us to continue offering energy that is more sustainable, affordable, and accessible to everyone.

At Moeve, we operate across the entire energy value chain, driving a model that is increasingly sustainable.

Toward a new horizon

Moeve up Industrial Lubricants

At Moeve, we offer a wide range of **high-quality** lubricants, specially formulated to ensure **maximum performance** of our customers' equipment and to optimize process efficiency. This is all under a **distinctive brand identity.**

Our next-generation lubricants comply with the latest regulations and ensure optimal lubrication for hydraulic systems, gears, compressors, turbines, and any other components requiring specialized oils or greases.

Find the most up-to-date information about our products at: moeveglobal.com/en and moeve.es/en





Industry and public works

Moeve Hydrostar HVLP	
ISO Grade	32, 46, and 68
Description	Premium universal hydraulic fluid with a high viscosity index, featuring antioxidant and anti-wear properties. Recommended for the most demanding hydraulic systems. Suitable for applications in circuits containing servovalves, numerical control equipment, robotic circuits, etc.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 3 HVLP • ISO 6743-4 HV • ISO 11158 HV • AFNOR NF-E 48-603 HV • ISO FILTERABILITY (Dry&Wet) • PARKER DENISON HF-0, HF-1, HF-2 • BOSCH-REXROTH 90220 • EATON Brochure 03-401-2012 • FIVES CINCINNATI P-68 (ISO 32) • P-69 (ISO 68) • P-70 (ISO 46)

Moeve Hydrostar HLP	
ISO Grade	15, 22, 32, 46, 68 and 100
Description	Premium universal hydraulic fluid with antioxidant and anti-wear properties. Meets the requirements of the most modern hydraulic systems equipped with next-generation pumps.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 2 HLP • ISO 6743-4 HM • ISO 11158 HM • AFNOR NF-E 48-603 HM • AFNOR filtrability (Dry&Wet) • PARKER DENISON HF-0, HF-1, HF-2 • EATON Brochure 03-401-2012 • BOSCH-REXROTH 90220 (ISO 46) • FIVES CINCINNATI P-68 (ISO 32), • P-69 (ISO 68) • P-70 (ISO 46) • ENGEL (ISO 46)

Moeve Hydrosic HVLP

ISO Grade	46
Description	High-viscosity index, ashless hydraulic fluid formulated with highly refined paraffinic base oils and free of zinc in its “ashless” formulation. Especially recommended for systems incorporating servovalves and for applications requiring ashless anti-wear hydraulic oils, as well as circuits subject to wide temperature variations.
Quality level	<ul style="list-style-type: none">• DIN 51524 Part 3 HVLP• ISO 6743 Part 4 HV• ISO 11158 HV• AFNOR NF-E 48-603 HV• FIVES CINCINNATI P-70• PARKER DENISON HF-0, HF-1, HF-2• Eaton E-FDGN-TB002-E• Bosch Rexroth RDE 90235

Moeve Hydrosic HLP

ISO Grade	32, 46, and 68
Description	Next-generation ashless hydraulic fluid, formulated with highly refined paraffinic base oils and free of zinc in its ashless formulation. Especially recommended for systems incorporating servovalves and for applications requiring ashless anti-wear hydraulic oils.
Quality level	<ul style="list-style-type: none">• DIN 51524 Part 2 HLP• ISO 6743-4 HM• ISO 11158 HM• AFNOR NF-E 48-603 HM

Moeve Hydro HVLP

ISO Grade	32, 46, and 68
Description	Hydraulic fluid formulated with refined paraffinic base oils of high viscosity index, with antioxidant and anti-wear properties. Its high viscosity index provides excellent thermal stability. Recommended for equipment operating outdoors and in applications subject to wide temperature variations.
Quality level	<ul style="list-style-type: none">• DIN 51524 Part 2 HLP• ISO 6743-4 HM• ISO 11158 HM• EATON Brochure 03-401-2012• AFNOR NF-E 48-603 HM



Moeve Hydro HLP	
ISO Grade	46 and 68
Description	Hydraulic fluid with anti-wear and antioxidant properties.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 2 HLP • ISO 6743-4 HM • ISO 11158 HM • AFNOR NF-E 48-603 HM

Moeve Hydrowork EP	
SAE Grade	10W-20
Description	Multigrade hydraulic fluid with EP characteristics, especially recommended for mobile equipment requiring an extreme-pressure fluid. Specifically designed for construction and mining machinery operating under severe service conditions.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 2 HLP • ISO 6743-4 HM • ISO 11158 HM • EATON Brochure 03-401-2012

Moeve Hydrowork POC	
ISO Grade	46
Description	Hydraulic fluid recommended for public works and mining machinery requiring POCLAIN quality level.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 3 HVLP • ISO 6743-4 HV • ISO 11158 HV • AFNOR NF-E 48-603 HV • EATON Brochure 03-401-2012 • POCLAIN (Grade P110 32-03J)



Special


Moeve Bio Hydrostar HVLP	
ISO Grade	32, 46, and 68
Description	Synthetic EAL (Environmentally Acceptable Lubricant) ester-based hydraulic fluid, specially developed for applications requiring a biodegradable product that complies with VGP 2013 regulations.
Quality level	<ul style="list-style-type: none"> • VDMA 24568 HEES class • ISO 15380 HEES class • EAL type for compliance with VGP 2013

Moeve Hydro HLPD	
ISO Grade	32 and 46
Description	Hydraulic fluid with anti-wear and detergent properties. With a high capacity to keep water emulsified with oil, it is especially recommended for hydraulic systems prone to heavy water contamination.
Quality level	<ul style="list-style-type: none"> • DIN 51524 HLPD

Moeve Hydrolift	
ISO Grade	46
Description	High-viscosity-index hydraulic fluid with antioxidant and anti-wear properties. Especially recommended for hydraulic systems in elevators and forklifts that operate using this type of drive.
Quality level	<ul style="list-style-type: none"> • DIN 51524 Part 3 HVLP • ISO 6743-4 HV • ISO 11158 HV • EATON Brochure 03-401-2012 • AFNOR NF-E 48-603 HV

Moeve Hydrogres SYNT	
ISO Grade	46
Description	Hydraulic fluid formulated from a balanced combination of synthetic and hydrotreated base oils, making it suitable for extreme working conditions and long drain intervals. Especially recommended for presses used in the ceramic industry.
Quality level	<ul style="list-style-type: none"> • ARKER DENISON HF-0, HF-1, HF-2 • AXIAL DANFOSS PISTON


Moeve Hydrogres	
ISO Grade	46
Description	Hydraulic fluid formulated with hydrotreated base oils. Especially recommended for presses used in the ceramic industry.
Quality level	<ul style="list-style-type: none"> • PARKER DENISON HF-0, HF-1, HF-2 • AXIAL DANFOSS PISTON

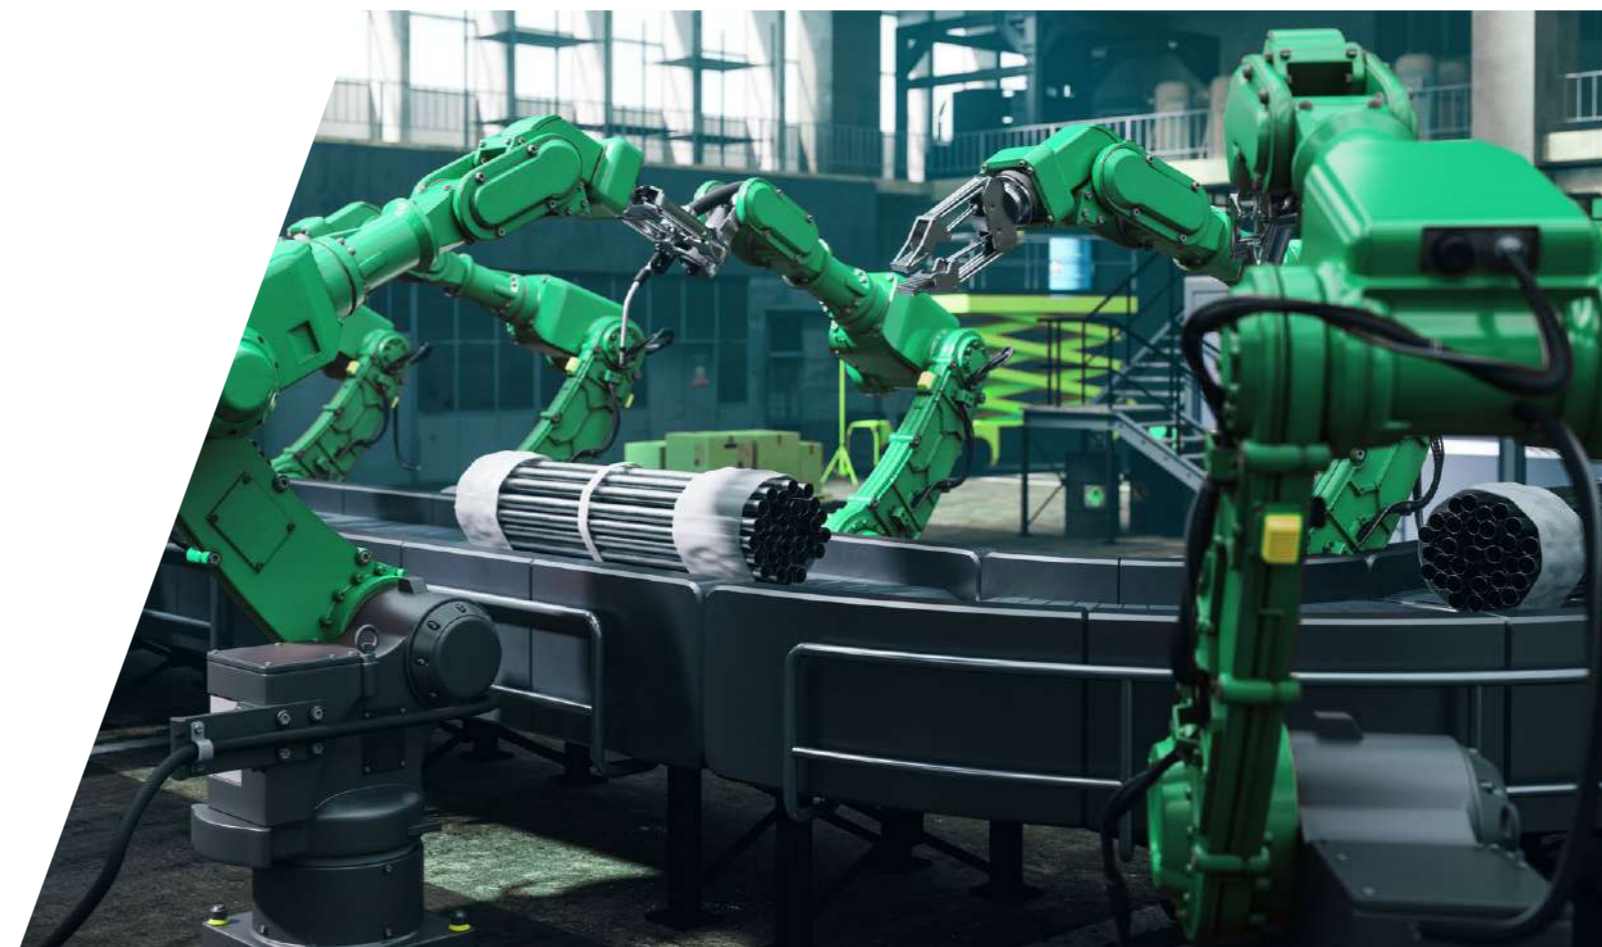

Fire-resistant

Moeve Fundicol SYNT EHC	
ISO Grade	46
Description	Fire-resistant hydraulic fluid formulated with phosphoric ester. Especially recommended for the electro-hydraulic control systems of steam turbines.
Quality level	<ul style="list-style-type: none">• ISO 6743/4 HFDR• FM Global Group - Standard 6930

Moeve Fundicol HFDU	
ISO Grade	46
Description	HFDU-type fire-resistant hydraulic fluid with a biodegradable synthetic ester base. Recommended for industries that require compliance with fire-resistance standards, such as the metallurgical, mining, and hot-rolling industries.
Quality level	<ul style="list-style-type: none">• ISO 6743/4 HFDU• ISO 12922 HFDU

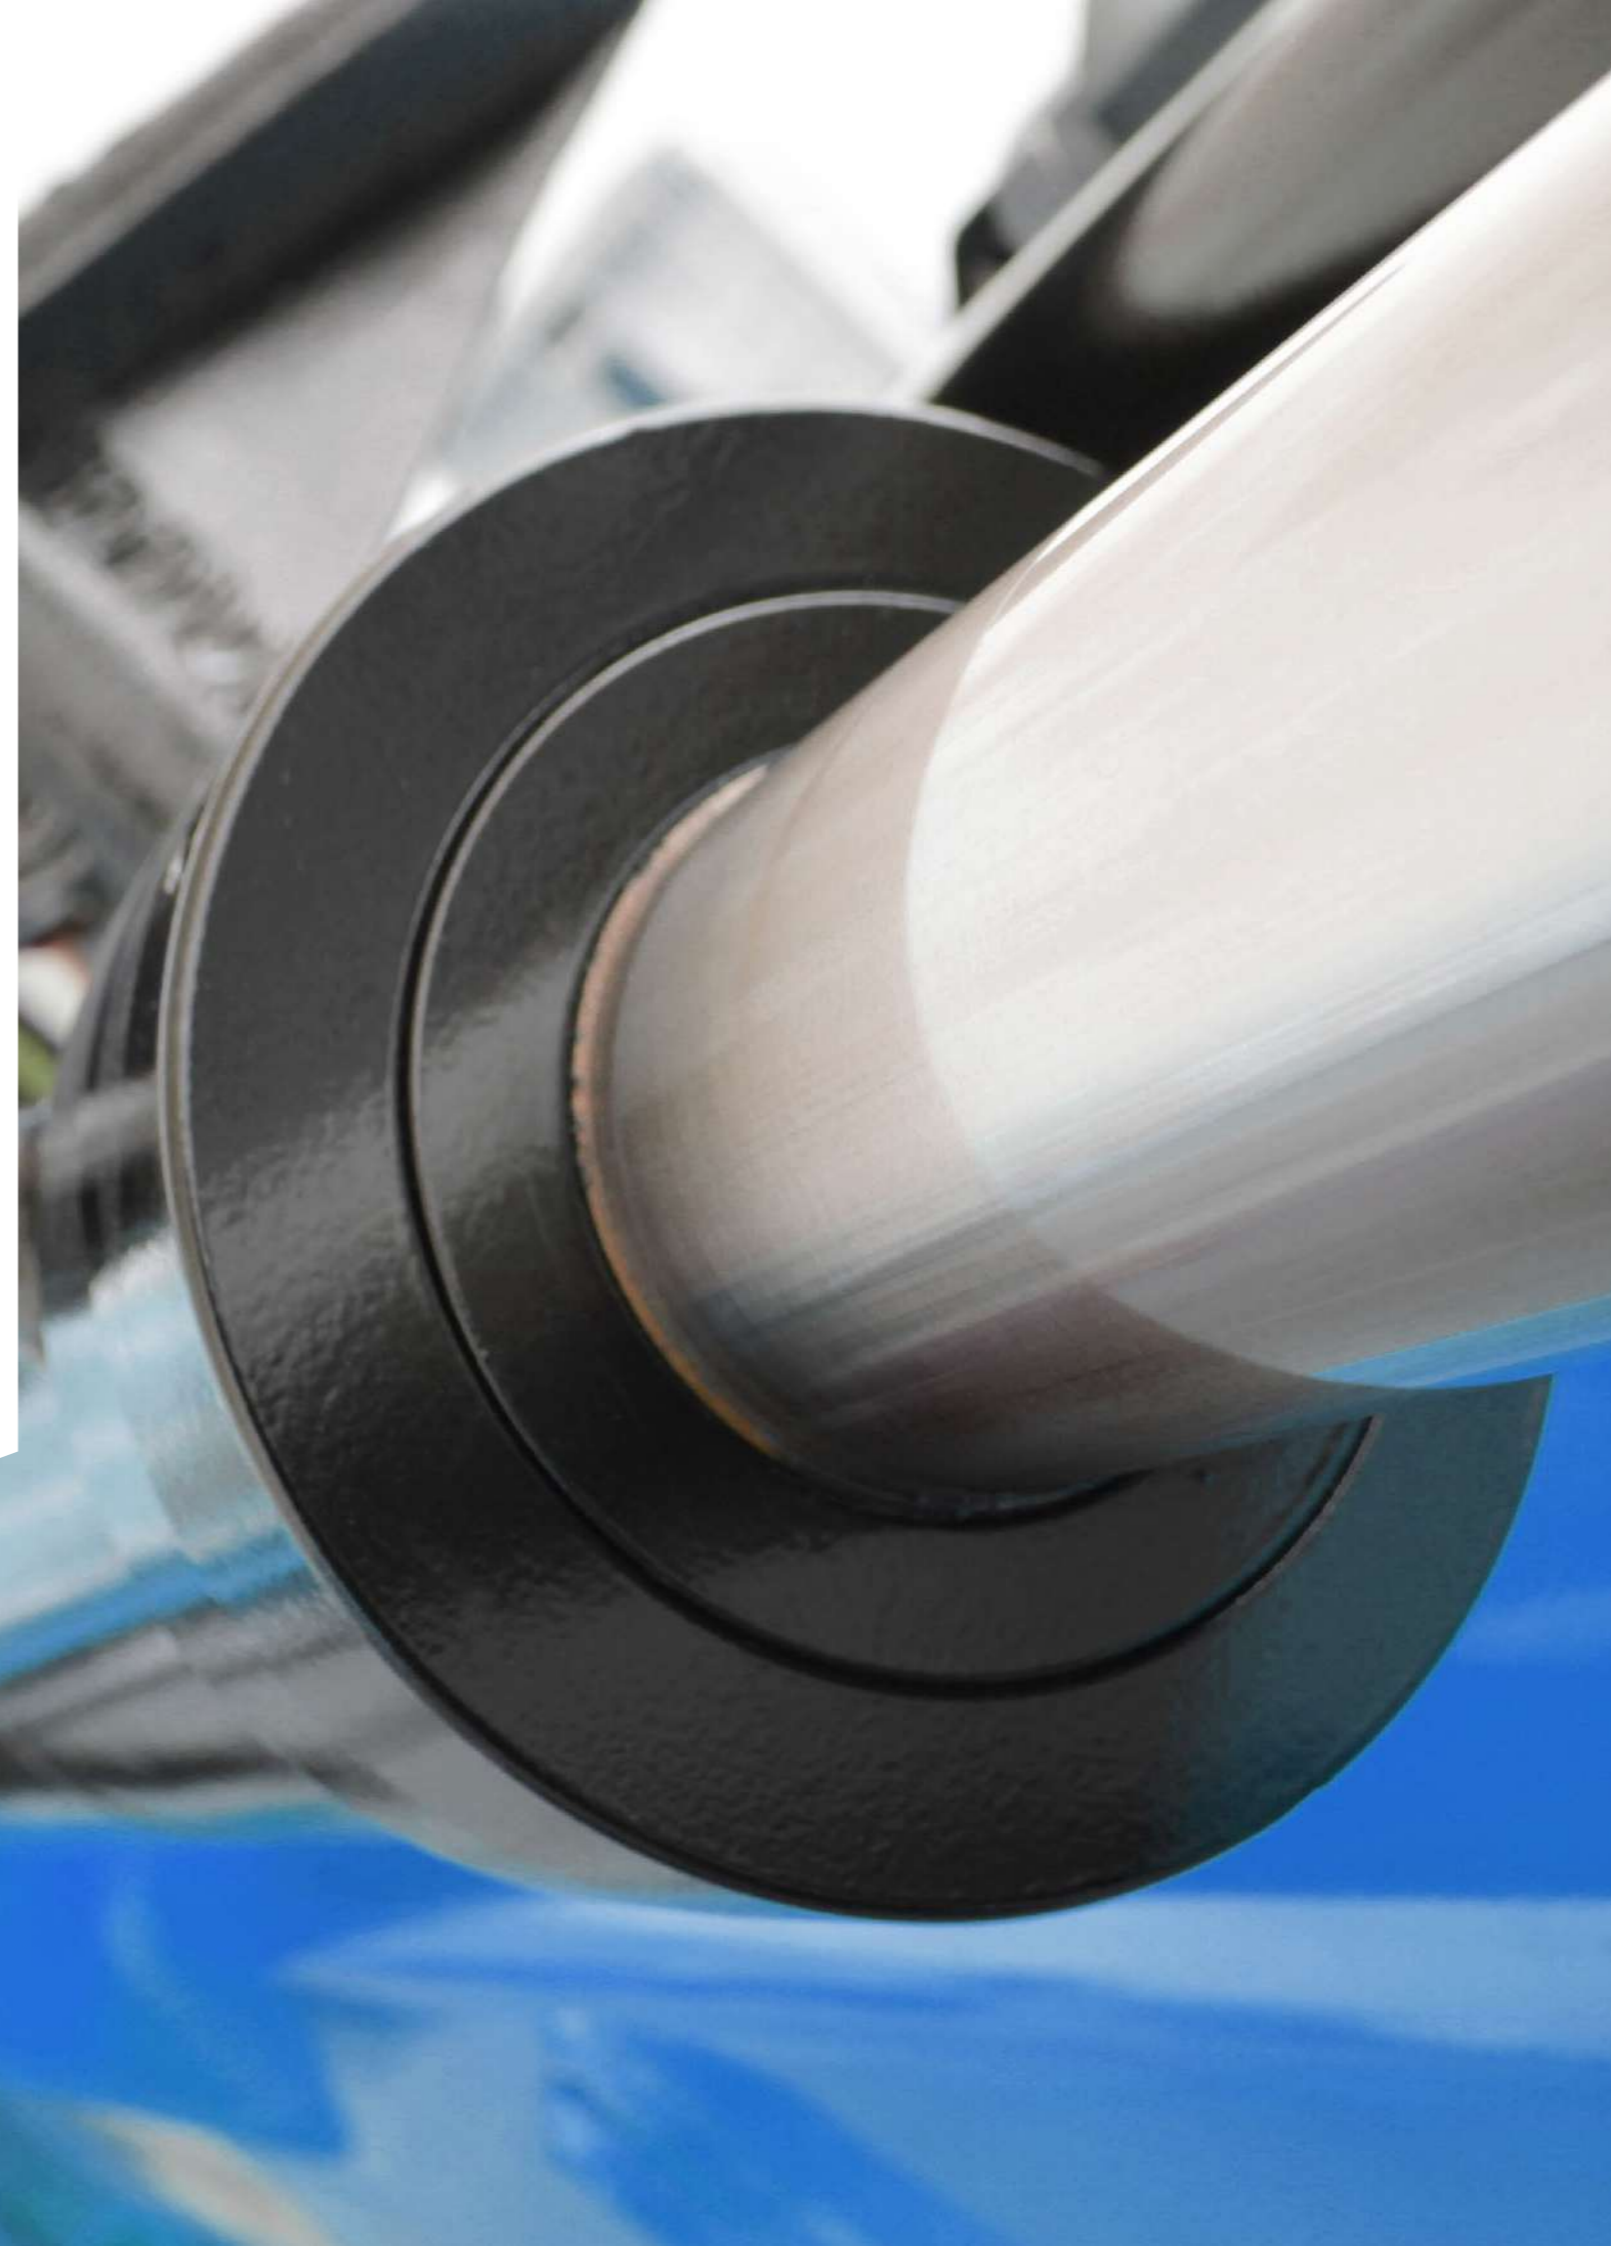



moeve

Moeve Client Solutions, S.A.U.

Paseo de la Castellana 259 A,
28046 Madrid, Spain

Customer Support:

+34 91 337 75 55

lubricantes@moeveglobal.com

www.moeve.es