


# Other industrial oils

Industrial lubricants.

moeve

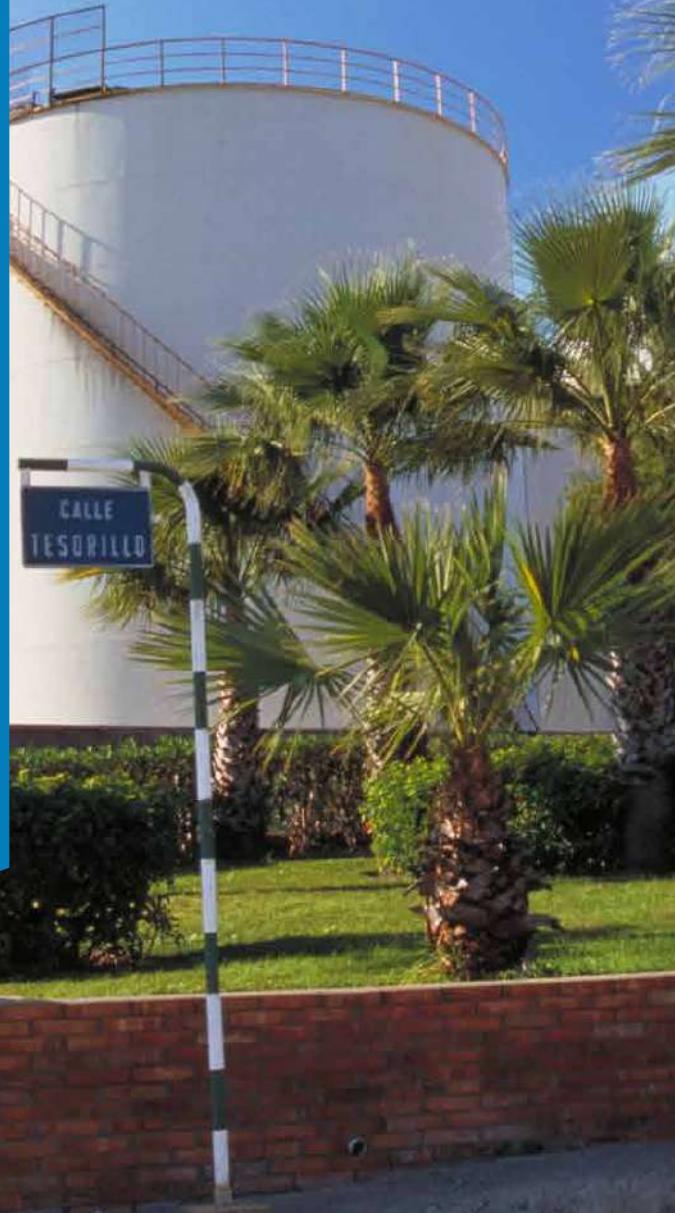

# CEPSA becomes moeve

We are a global company comprising over 11,000 employees, **committed to sustainable energy and mobility**.

Our ambition is to drive Europe's energy transition and accelerate decarbonization both within the company and for its customers.

We have more than 90 years of experience. This has led us to become one of the **leading companies in the Spanish energy sector** and to expand our activities across five continents.

In 2022, we launched our **Positive Motion** strategy to become a leader of the energy transition.

Since 2024, we have been Moeve, a decisive step that ensures today's energy supply while focusing on enabling the sustainable energy of tomorrow.

Our lubricants also are part of this transformation. The San Roque blending and packaging plant operates entirely with 100% renewable electricity. This milestone drives us to continue offering energy that is more sustainable, affordable, and accessible to everyone.

**At Moeve, we operate across the entire energy value chain, driving a model that is increasingly sustainable.**

## Toward a new horizon Industrial lubricants

At Moeve, we offer a wide range of **high-quality lubricants**, specially formulated to ensure **maximum performance** of our customers' equipment and to optimize process efficiency. This is all under a **distinctive brand identity**.

Our next-generation lubricants comply with the latest regulations and ensure optimal lubrication for hydraulic systems, gears, compressors, turbines, and any other components requiring specialized oils or greases.

Find the most up-to-date information about our products at: [moeveglobal.com/en](http://moeveglobal.com/en) and [moeve.es/en](http://moeve.es/en)



# Dielectric

# Special applications

| Moeve Elekoil UHV |  |
|-------------------|--|
| Description       | Uninhibited dielectric lubricant formulated with naphthenic base oils, designed to maintain its initial properties over long periods of time. Recommended for use in all types of electrical transformers and other equipment requiring a fluid with high dielectric strength. |
| Quality level     | IEC 60296 Ed. 4 (2012), Type U Uninhibited   |

| Moeve Slideway |   |
|----------------|---|
| ISO Grade      | 68, 150, and 220  |
| Description    | Lubricant formulated for use on machine tool slideways and guides. Especially recommended for operations under very high loads and very low speeds, as well as for high-precision work. |
| Quality level  | <ul style="list-style-type: none"> <li>· FIVES CINCINNATI P-47 (ISO 68) and P-50 (ISO 220)</li> <li>· MÜLLER WEINGARTEN</li> </ul>  |

# Thermal

| Moeve Diatherm S |   |
|------------------|---|
| Description      | Synthetic heat transfer fluid based on alkylbenzene. Formulated to improve pumpability and extend drain intervals. This product allows operation at lower pressures than steam. |
| Quality level    | <ul style="list-style-type: none"> <li>· DIN 51522</li> <li>· ISO 6743 L-QB</li> </ul>  |

| Moeve Diatherm |  |
|----------------|--|
| ISO Grade      | 22 and 32  |
| Description    | Heat transfer fluid for closed circulation systems with a maximum film temperature of 310 °C. Its high chemical stability and resistance to elevated temperatures reduce deposit formation, allowing for long drain intervals. |

| Moeve Termoclean |   |
|------------------|---|
| Description      | Synthetic detergent fluid for cleaning hydraulic and thermal circuits. Used diluted at a minimum proportion of 5% in the lubricant already in the circuit, it should be circulated for 48 hours before complete draining. |
| ISO Grade        | 100 and 150   |

| Moeve Drill |   |
|-------------|---|
| Description | Lubricant developed for the lubrication of drilling equipment and all types of pneumatic tools. Especially recommended for drilling equipment used in mining, quarries, excavations, tunnel construction, and related applications. |
| ISO Grade   | 100 and 150   |

| Moeve Extoil |  |
|--------------|--|
| Description  | Lubricant specially formulated for use as a plasticizing lubricant in the rubber and rubber-derivatives industry. Recommended for calendering, extrusion, molding processes, and for use as extenders. |
| ISO Grade    | 100 and 150  |

| Moeve Motosierras |   |
|-------------------|---|
| Description       | High-adhesion lubricant especially recommended for the lubrication of chainsaw chains, preventing premature wear. |

# White oils

| Moeve Blamedol T |  |
|------------------|--|
| ISO Grade        | 15   |
| Description      | Technical-grade medicinal white oil for processes requiring an additive-free white lubricant. Recommended for use in the textile and paper industries.   |
| Quality level    | <ul style="list-style-type: none"> <li>· NSF Nonfood Compounds Registration</li> <li>· 21 CFR 178.3620 (b), Food and Drug Administration (FDA)</li> <li>· USDA H-1 of the United States Department of Agriculture</li> </ul> |

| Moeve Blamedol MF |  |
|-------------------|--|
| ISO Grade         | 46, 68, 150, 220, 320 and 460  |
| Description       | Multifunctional white lubricant formulated with medicinal white oils and polyisobutene. Recommended for high-pressure hydraulic systems requiring an NSF H1 lubricant with anti-wear properties.   |
| Quality level     | <ul style="list-style-type: none"> <li>· NSF Nonfood Compounds Registration</li> <li>· USDA H-1 of the United States Department of Agriculture</li> <li>· Requirements such as HLP Hydraulic and CLP, such as DIN 51.517 Gears and VDL Compressors.</li> </ul> |

| Moeve Blamedol |   |
|----------------|---|
| ISO Grade      | 15, 32, and 68  |
| Description    | Medicinal white oil formulated with fully saturated hydrocarbons, free of sulfonates, and compliant with the purity requirements of the ultraviolet absorption test. Recommended in the food industry where an NSF H1 lubricant is required due to possible incidental contact with food, and for use in the impregnation of fruit and vegetable wrappings.   |
| Quality level  | <ul style="list-style-type: none"> <li>· NSF Nonfood Compounds Registration</li> <li>· 21 CFR 172.878, Food and Drug Administration (FDA)</li> <li>· 21 CFR 178.3620 (a), Food and Drug Administration (FDA)</li> <li>· USDA H1 and 3H (United States Department of Agriculture)</li> <li>· PHARMACOPOEIAS BP (British), USP (United States)</li> <li>· QBA (German) and EUP (European).</li> </ul> |

| Moeve Blamedol 15 AF |  |
|----------------------|--|
| ISO Grade            | 15   |
| Description          | Sulfonate-free medicinal white oil formulated with fully saturated hydrocarbons, and meeting the purity requirements of the ultraviolet absorption test. Specially developed for use in the animal feed industry.                          |
| Quality level        | <ul style="list-style-type: none"> <li>· NSF Nonfood Compounds Registration (H1)</li> <li>· FDA 21 CFR 172.878 / 178.3620 (a)</li> <li>· PHARMACOPOEIAS USP (American), EUP (Europe), Royal Pharmacopoeia Española (RFE), CODEX</li> </ul> |





**Moeve Commercial, S.A.U.**  
Paseo de la Castellana 259 A,  
28046 Madrid, Spain  
Customer Support:  
(+34) 91 337 75 55  
[lubricantes@moeveglobal.com](mailto:lubricantes@moeveglobal.com)  
[www.moeve.es](http://www.moeve.es)